

## Recipe configurator Lattiz 2.0

Quick guide for how to use the Lattiz 2.0 as a recipe configurator via USB.  
Following steps describe on how to download and upload the recipes of a Lattiz 2.0 via USB.

### Application range

- Lattiz 2.0 machines software bundle version V6.13.x and higher


### Necessary tools

- USB stick formatted **FAT32**

### Important note


The formatting of the USB stick must be **FAT32** and the folder structure on the USB stick must be as described. It is not allowed to modify the downloaded recipes "bin datas"!

### Instruction

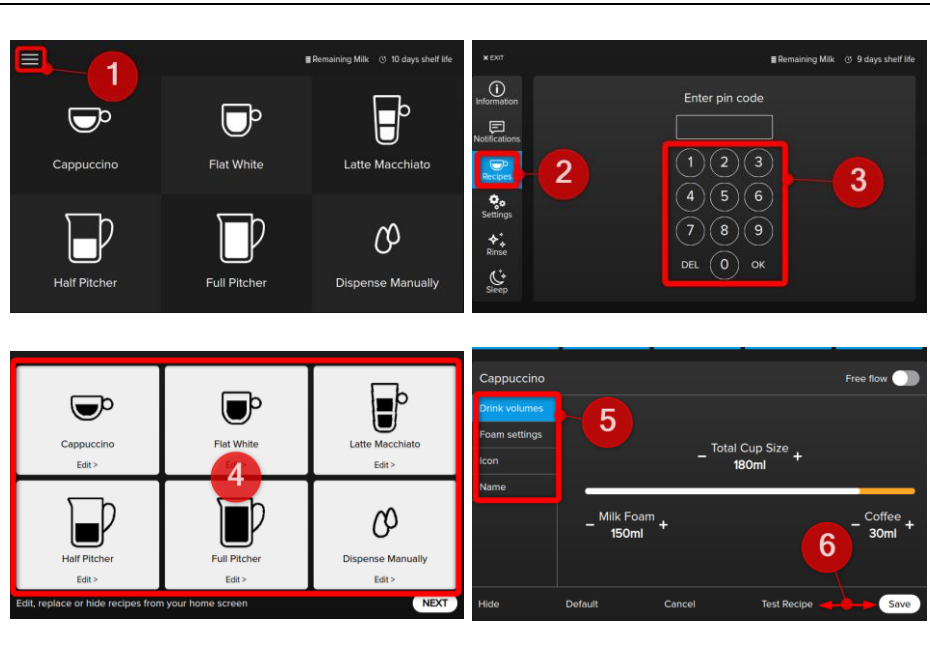
<p><b>Step 1 Prepare</b></p> <ol style="list-style-type: none"><li>1) Enter the menu</li><li>2) Press Recipes</li><li>3) Enter the password</li><li>4) Adjust the drinks menu</li><li>5) Modify parameters</li><li>6) Test &amp; save settings</li></ol>	 <p>The screenshots illustrate the steps for configuring recipes on the Lattiz 2.0 machine:</p> <ul style="list-style-type: none"><li><b>Step 1:</b> The main menu screen with icons for Cappuccino, Flat White, Latte Macchiato, Half Pitcher, Full Pitcher, and Dispense Manually. A red circle with '1' highlights the menu icon in the top left.</li><li><b>Step 2:</b> The 'Recipes' screen with a red circle with '2' highlighting the 'Recipes' icon in the left sidebar.</li><li><b>Step 3:</b> The 'Enter pin code' screen with a numeric keypad. A red circle with '3' highlights the keypad.</li><li><b>Step 4:</b> The 'Edit' screen for a recipe, showing a grid of drink icons. A red circle with '4' highlights the 'Full Pitcher' icon.</li><li><b>Step 5:</b> The 'Cappuccino' settings screen with a red circle with '5' highlighting the 'Drink volumes' option in the left sidebar.</li><li><b>Step 6:</b> The 'Cappuccino' settings screen showing 'Total Cup Size' and 'Milk Foam' sliders. A red circle with '6' highlights the 'Save' button at the bottom right.</li></ul>
--	--





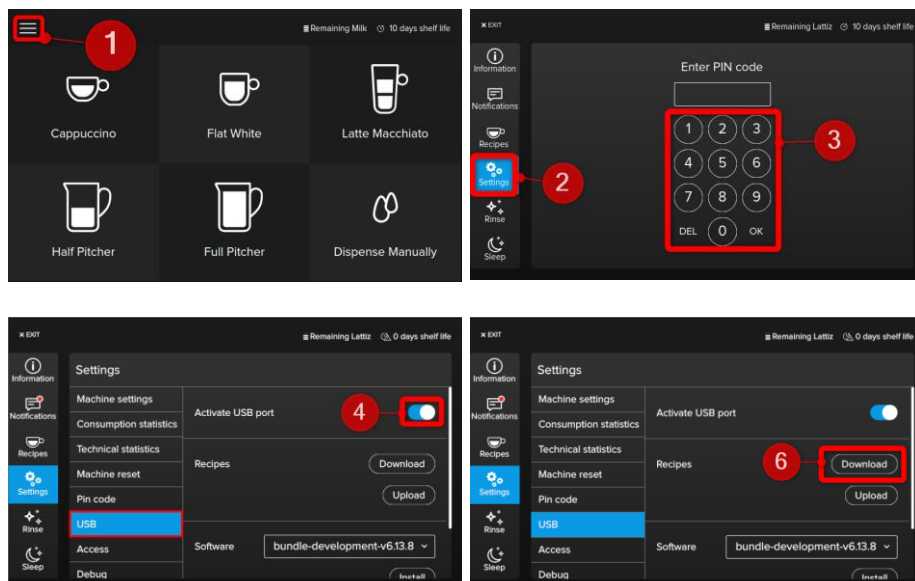


## Step 2 Download

- 1) Enter the menu
- 2) Press Settings
- 3) Enter the password
- 4) Activate the USB port
- 5) Insert the USB stick  
*USB stick recognized highlighted in white*
- 6) Press Download  
*Wait for pop-up message which confirms download*
- 7) Remove USB stick




A new folder was created on your USB stick, named recipes download. In this folder a sub-folder with a time stamp and another sub-folder named user-recipes is created. In these sub-folders the binaries of the modified recipes can be found (101.bin, 102.bin, 103.bin, 104.bin, 105.bin, 106.bin).

← → ▾ ▴  > USB DISK (E:) > recipes\_download > 2023-06-27\_17-17-11 > user-recipes

Name	Änderungsdatum	Typ	Größe
 100.bin	27.06.2023 15:17	Video File	1 KB
 101.bin	27.06.2023 15:17	Video File	1 KB
 102.bin	27.06.2023 15:17	Video File	1 KB
 103.bin	27.06.2023 15:17	Video File	1 KB
 104.bin	27.06.2023 15:17	Video File	1 KB
 105.bin	27.06.2023 15:17	Video File	1 KB
 106.bin	27.06.2023 15:17	Video File	1 KB

## Step 3 Upload

- 1) Enter the menu
- 2) Press Settings
- 3) Enter the password
- 4) Activate the USB port
- 5) Insert the USB stick  
*USB stick recognized highlighted in white*
- 6) Press Upload  
*Wait for pop-up message which confirms upload*
- 7) Remove USB stick

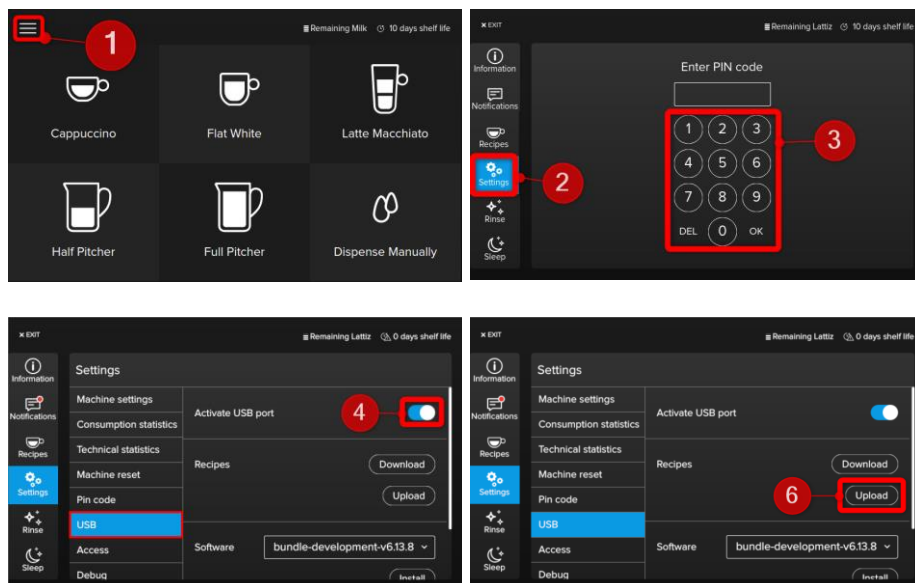

## Important

Copy the recipe binaries to the newly created recipes upload folder (see chapter 3, point 6 above). Attention, only 6 recipes should be added, and their name should be as follows: 101.bin, 102.bin, 103.bin, 104.bin, 105.bin, 106.bin.

**It is not allowed to modify the downloaded bin!**

